

Product data sheet

Summary

Overview of product data:
5XA5913K1A08


SL10mn,ST1.2a,LED3320lm740,Basic



LED

Product description

Streetlight 10 mini LED, mast luminaire, primary light control with 3 zone faceted reflector, of plastic, aluminium vaporised, primary optical cover: cover, of PMMA, transparent, light emission: direct distribution, primary light characteristic: asymmetric, installation type: post-top, side-entry, LED light colour: 740, colour temperature: 4000K, control gear: ECG Basic, control: overheat protection, power reduction, electronic power reduction, with terminal, 4-pole, max. 2.5mm², mains connection: 220..240V, AC, 50/60Hz, start of lifetime: 31 W, end of lifetime: 31 W, reduction: 16 W, luminaire housing, of diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), length: 620 mm, width: 170 mm, height: 137mm, spigot size: 42/60/76mm (post-top) and 42/60mm (side-entry), mast flange for spigot size: 42mm: 5XA59000XM4, 60mm: 5XA59000XM2, 76mm: 5XA59000XM1, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, VDE, permissible ambient temperature for outdoor applications: -25..+50°C, standard-compliant lighting for roads and squares, packaging unit: 1 piece

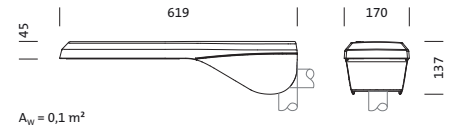

Lamps: LED
Wt. (kg): 4.5
Order No.: 5XA5913K1A08
GTIN (EAN): 4050737553788

5XA5913K1A08: 1x LED 4000K / CRI ≥ 70

5XA5913K1A08

The luminaire contains built-in LED lamps

A++
A+
A
B
C
D
E

LED

The LED-lamps cannot be changed in the luminaire

874/2012

